

# ADDA SYSTEMS - AVALANCHE TRIP STEERING DIODE 5, 8 & 10



## Features


- 25 AMP DIODES
- 1600 VOLTS VRRM
- 0.34 kA Ifsm(10msec)
- $I^2t$  - 580 A<sup>2</sup>s
- DIN Rail Mounting

This is a 10 way diode board that can be supplied in 2 formats, for mounting on DIN ⚡ Rail. Normally used for combining multiple TRIP signals to a single output to drive a Trip Relay.




## Specifications

Symbol	Ratings	Unit
$V_{RRM}$	800-1600	V
$I_{RRM}$	6	mA
$I_{F(AV)}$ (°C)	25 (120)	A
$I_{FRMS}$	39	A
$I_{FSM}$ (10ms)	0.34	kA
$I^2t$	0.58	A <sup>2</sup> s 10 <sup>3</sup>
$V_{FM} / I_{FM}$	1.35 / 78	V / A
$V_{T(TO)}$	0.90	V
PRSM 100mks	2.5	kW
$T_{jmax}$	160	°C
$R_{th(j-c)}$	1.100	°C / W
$M_d$	0.9-1.1	Nm
w	0.006	kg


a). As 5,8 or 10 individual diodes.



b). As two groups of 5 diodes with anodes connected to a common.

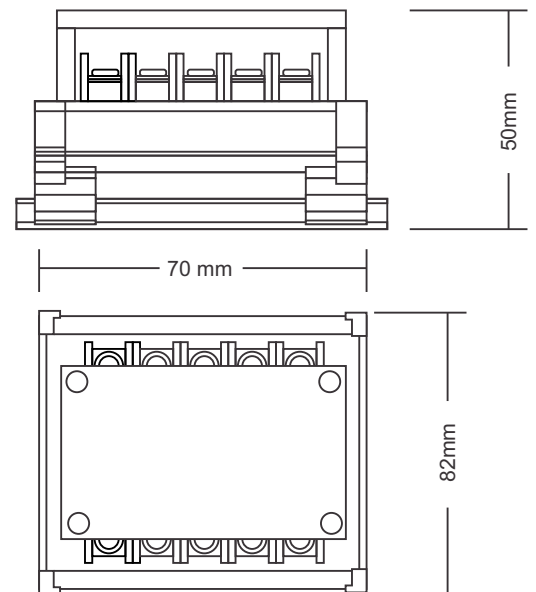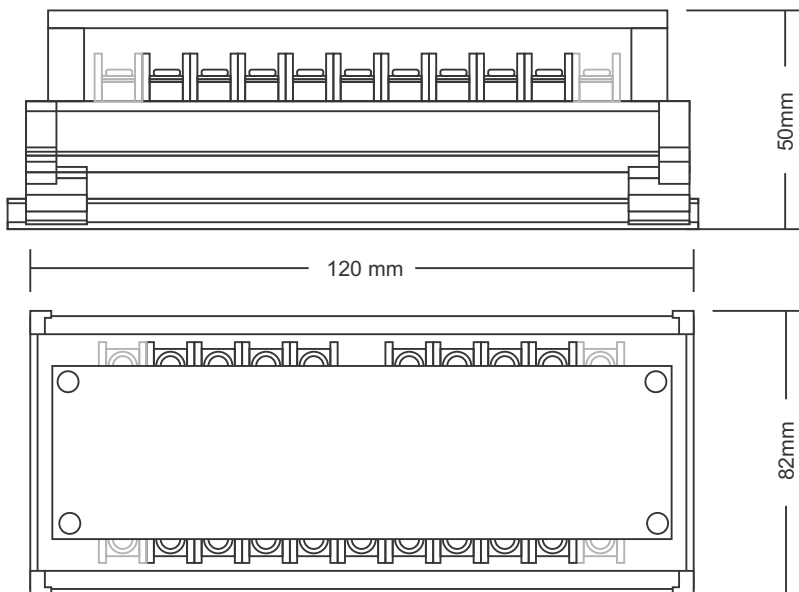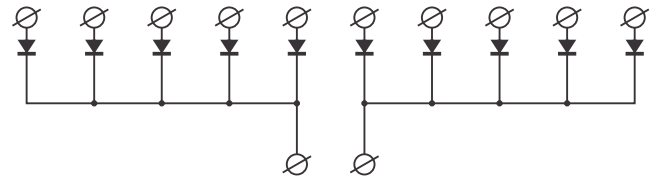

ATRIP-3 (3 way)

 S - Normally Stock  
L - Limited Stock  
O - Ex Order

TRIP STEERING DIODE

ATRIP-5 (5 way)

ATRIP-8 (8 way)

ATRIP-10 (10 way)


Pictured is a 10 way diode board that can be supplied in 2 formats, for mounting on DIN Rail. Normally used for combining multiple TRIP signals to a single output to drive a Trip Relay.

- 3, 5, 8, 10 Way Board Options
- 25A Diodes
- 1600V VRRM
- 0.34 kA LFSM (10msec)
- $I^2t$  - 580 A<sup>2</sup>s
- DIN Rail mounting



Symbol	Ratings	Unit
$V_{RRM}$	800-1600	V
$I_{RRM}$	6	mA
$I_{F(AV)} (^{\circ}C)$	25 (120)	A
$I_{FRMS}$	39	A
$I_{FSM} (10ms)$	0.34	kA
$I^2t$	0.58	A <sup>2</sup> s 10 <sup>3</sup>
$V_{FM} / I_{FM}$	1.35 / 78	V / A
$V_{T(TO)}$	0.90	V
PRSM 100mks	2.5	kW
$T_{jmax}$	160	<sup>o</sup> C
$R_{th(j-c)}$	1.100	<sup>o</sup> C / W
$M_d$	0.9-1.1	Nm
w	0.006	kg

a). As 5,8 or 10 individual diodes.



b). As two groups of 5 diodes with anodes connected to a common.

