

QELT-UL

UL (RU certified) LED lighting that emits high brightness in the distribution panel space



QELT-UL

PRODUCT SPECIFICATION

QELT-UL

Materials Lens-PC, Side cover-ABS, Bracket-STS201
Ambient operating temperature -30°C to +50°C
Certificates UL(RU)

- Wide direct light distribution for high illumination in the distribution panel
- Built-in terminal allows easy wiring
- LED direct AC connect system, no need other power device
- 4 kinds of products length 200/300/400/500mm for each condition
- Removable mount bracket that adjust mount distance

Specifications

QELT-UL Terminal Box Equipped



Detachable mounting bracket



Detachable mounting bracket structure with free mounting hole spacing

QELT-UL LED Light Bars for Distribution Panel


Optics Specifications				
Model number	QELT-200-UL	QELT-300-UL	QELT-400-UL	QELT-500-UL
Lens color	Translucent	Translucent	Translucent	Translucent
Light color	Cooldaylight			
Color temperature	6,000-7,000K			
Luminous flux	370lm	780lm	1,180lm	1,310lm
Illumination(at 1m)	95Lux	200Lux	300Lux	335Lux
Specifications				
Model number	QELT-200-UL	QELT-300-UL	QELT-400-UL	QELT-500-UL
Voltage	AC110V-120V			
Range for operation voltage	AC98V-132V			
Power consumption	5W	9W	13W	15W
Insulation resistance	Min. 100MΩ(500V DC mega ohm meter)			
Withstanding voltage	1,500VAC, 60Hz, 1 minute			
Operating temperature	-30°C - +50°C			
Protection rating	Non-Waterproof			
Materials	Lens-PC, Side cover-ABS, Bracket-STS201			
Certifications	c RU us			
Weight(Approx.)	0.10kg	0.12kg	0.15kg	0.17kg

※ UL(RU Listed): AC110-120V

Technical Diagram

Units: mm

·QELT-UL

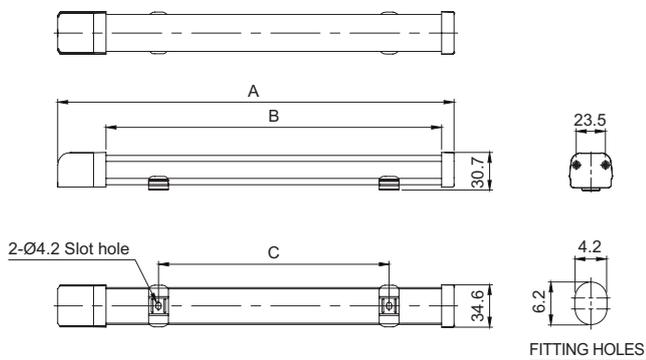


MODEL	A	B	C
QELT-200-UL	249	200	16-170
QELT-300-UL	349	300	16-270
QELT-400-UL	449	400	16-370
QELT-500-UL	549	500	16-470

Ordering Specification

QELT	-	300	-	110/120	-	UL
[Model number]		[Product length]		[Voltage]		[Certificates]
QELT-Terminal box equipped		200-200mm 300-300mm 400-400mm 500-500mm		110/120-AC110V-120V		UL-UL(RU)

LED Light Bars for Distribution Panel

QELT-UL

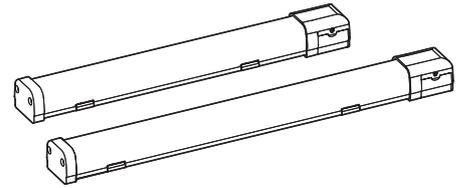

Please read this user manual carefully prior to installation and operation to ensure safe and correct use.

⚠ Precautions for Safety

Failure to follow the instructions below may cause a loss of life or serious physical injury.

1. During wiring or maintenance, please completely turn off the power of the product. (Failure to follow this may lead to an electric shock.)
2. Do not install the product in locations that subjects it to excessive dust or water other than the conditions designated by the IP protection ratings indicated for each product. (Failure to follow these instructions may cause a fire to the product, electric shock, physical injury, malfunction or damage to the product.)
3. Do not alter or repair this product. If maintenance or repair service is required, please contact your local Qlight contact point. (Failure to follow these instructions may lead to fire, electric shock, or product damage.)
4. Please apply the correct voltage to the product. (Failure to follow these instructions may lead to fire, electric shock, or product damage.)
5. When the product is applied to a condition that may impact lives or property, please make sure to have a double safety device. (Failure to follow this may cause damage to property, fire, electric shock and loss of life.)

⚠ Precautions for Correct Use

Failure to follow the proper instructions may cause damage to property, the product, or malfunction of the product that would void the warranty.

1. Please remove any objects that can interrupt ventilation around the product.
2. Please turn off the power of the product immediately if it fails to operate properly.
3. Carefully wire the product according to each product's specification.
4. Please be careful in preventing chemicals such as thinner, benzene, etc. in contact with the surface of the product.
5. Do not apply excessive force/impact to the product.
6. Failure to follow any of the instructions above may cause malfunction or damage to the product, fire, and electric shock.

Ordering Specifications

QELT	-	200	-	110/120	-	UL
[Model number]		[Product length]		[Voltage]		[Certificates]
• QELT - Terminal box equipped		• 200 - 200mm • 300 - 300mm • 400 - 400mm • 500 - 500mm		• 110/120 - AC110V-120V		• UL - UL(RU)

Product Specifications

■ Optics Specifications

Model number	QELT-200-UL	QELT-300-UL	QELT-400-UL	QELT-500-UL
Directions	Translucent	Translucent	Translucent	Translucent
Light color (Standard)	Cool daylight			
Color temperature	6,000-7,000K			
Luminous flux	370lm	780lm	1,180lm	1,310lm
Illumination (at 1m)	95Lux	200Lux	300Lux	335Lux

■ General Product Specifications


Model number	QELT-200-UL	QELT-300-UL	QELT-400-UL	QELT-500-UL
Rated voltage	AC110V-120V			
Range for operating voltage	AC98V-132V			
Power consumption	5W	9W	13W	15W
Insulation resistance	Min. 100MΩ(500V DC mega ohm meter)			
Withstanding voltage	1,500VAC, 60Hz, 1 minute			
Operating temperature	-30°C to +50°C			
Protection rating	Non waterproof			
Materials	Lens-PC, Side cover-ABS, Bracket-ST5201			
Certificate				
Weight(approx.)	0.10kg	0.12kg	0.15kg	0.17kg

※ UL(RU Listed): AC110-120V

Dimensions

(Units : mm)

QELT-UL

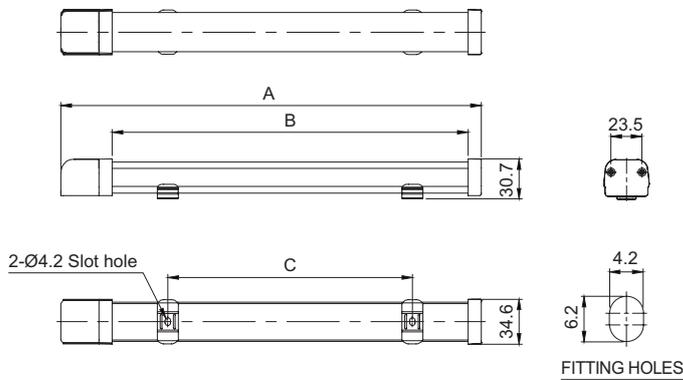


MODEL	A	B	C
QELT-200-UL	249	200	16-170
QELT-300-UL	349	300	16-270
QELT-400-UL	449	400	16-370
QELT-500-UL	549	500	16-470

Wiring Instructions

QELT-UL


AC



- AC type cable specification : External power line - VCTFK(0.75sq) x 2C 450mm
- This product can be wired regardless of polarity.
- This product does not provide a power cord.

Parts definition/ Bracket Adjustment/ Terminal Wiring/ Switch

■ Parts Definition

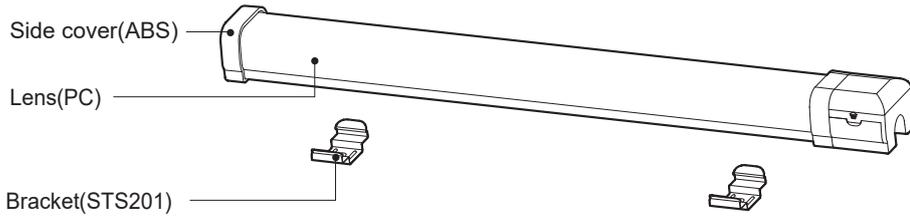


■ Bracket Adjustment

- Mounting brackets are removable with special sliding structure that allows easy adjustment of distance between the two mounting brackets.

■ Terminal Wiring

- Please wire the power cord to the terminal block as shown below.

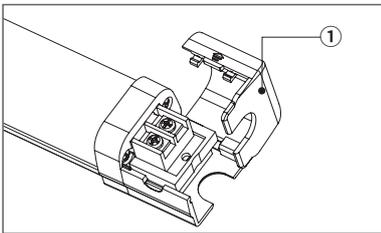


- 1) Lift open the terminal box cover ①
- 2) Loosen the bolts in the terminal box by rotating them in the CCW direction.
Connect the power lines to the terminals and then fasten the lines by rotating the bolts in the CW direction (Product can be wired regardless of polarity).
- 3) After the power lines have been connected, please close the terminal box cover ①.

Installation/ Mounting Hole Specifications


■ Installation

- First, machine taps or holes on the mounting surface ①.
- The mounting hole of this product is 4.2mm in diameter (long hole).
- When machining taps, fasten the bolt through the mounting hole of the product.
- When machining holes, insert the bolt through the hole of the product, and tighten the nut from the opposite side of the mounting surface.
(Install flat washer and spring washer when fastening bolt and nut.)
- To secure the product to brackets, place the products to brackets and push it lightly until it makes “clark” sound.

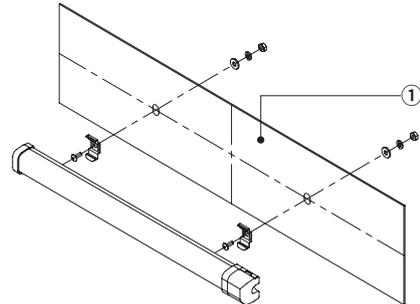

■ Mounting Hole Specifications


- Machine holes on the mounting surface referring to the diagram below.

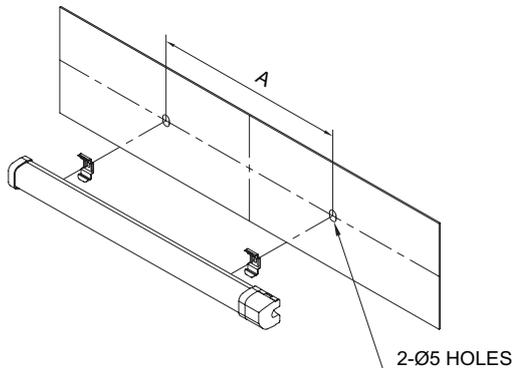

MODEL	A
QELT-200-UL	16~170
QELT-300-UL	16~270
QELT-400-UL	16~370
QELT-500-UL	16~470

Installation Environment and Protection Rating

- This product is not waterproof.
- This product is designed for only indoor use.
- If the product is installed in locations that subject it to excessive dust or water other than the designated IP protection rating indicated, it may cause malfunction or damage to the product.
- For further information, please visit our website(www.qlight.com).



For your safety

Specification and dimensions listed in this catalogue subject to change without notice for product quality improvement.

Please read the instruction manual attached to the product carefully before installation and use.

JHB Branch

Mimic Components, Address: 5 Ramsay Street, Booyens, 2091, Johannesburg. Switchboard: +27(0)11-689-5700 | WhatsApp: 071-979-9999
PO Box 38493, Booyens, 2016, Johannesburg, South Africa. Email: info1@mimiccomponents.co.za | Website: www.mimiccomponents.co.za

Cape Branch

Mimic Cape. Address: Unit 41A, Stella Park, 57 Stella Road, Montague Gardens, 7441, Cape Town. Switchboard: +27(0)21-551-8185
WhatsApp: 071-979-9999. Po Box 36955, Chempet, 7442, Cape Town, South Africa. Email: info@mimic-cape.co.za | Website: www.mimic-cape.co.za