


SSL series

LED Signal Lights for Container Spreaders



Provides excellent durability to extreme vibration and shock

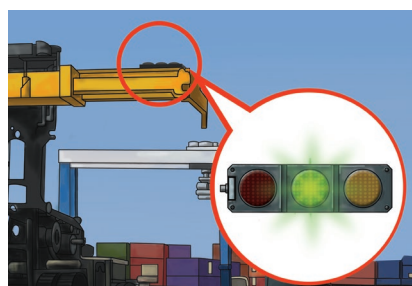
Suitable for container spreader, harbor loading equipment, and outdoor conveyor applications



**SSL100W/ SSL200W
SSL300W/ SSL400W**



**SSL100M/ SSL200M
SSL300M/ SSL400M**



SSL LED Steady Signal Lights for Container Spreaders

- Special anti-reflective lens applied to avoid mistaking the reflected sun light as a signal light (W type)
- M type has excellent visibility from a distance with clear and distinctive layer colors
- Superior durability in extreme vibration and shock thanks to a molded assembly process instead of conventional bolt fastened assembly method
- Customized color arrangement available (Lens color configuration is initiated from the side of cable entry)
- Materials : Housing-AL, Lens-PC
- Ambient operating temperature : -40°C to +60°C
- Certificates : CE Compliant
- Protection rating : IP68 (IEC60529)



Specification

Model number	Voltage	Current	Certificates	Weight	Cable entry	Color
SSL100	DC24V	0.151A	CE DC24V Only	1.80kg	Select one option between M12-5PIN (male) and C10-Cable	● R-Red
	AC110V	0.040A		1.85kg		
	AC220V	0.040A		1.85kg		
SSL200	DC24V	0.302A		2.15kg		● R-Red ● G-Green
	AC110V	0.080A		2.20kg		
	AC220V	0.080A		2.20kg		
SSL300	DC24V	0.453A		2.50kg		● R-Red ● A-Amber ● G-Green
	AC110V	0.120A		2.55kg		
	AC220V	0.120A		2.55kg		
SSL400	DC24V	0.604A		2.95kg		● R-Red ● A-Amber ● G-Green ● B-Blue
	AC110V	0.160A		3.00kg		
	AC220V	0.160A		3.00kg		


SSL series Vibration and Shock Test Conditions

Axial direction	Direction X	Direction Y	Direction Z
Vibration test conditions	10-38 Hz, 3.5mm 38-500 Hz, 20g 1 oct/min, 2 hours	10-38 Hz, 3.5mm 38-500 Hz, 20g 1 oct/min, 2 hours	10-38 Hz, 3.5mm 38-500 Hz, 20g 1 oct/min, 2 hours
Shock test conditions	50g 6 ms ±1000 shocks	50g 6 ms ±1000 shocks	50g 6 ms ±1000 shocks











Ordering Specification

SSL100W	-	24	-	R
[Model number]		[Voltage]		[Color]
• SSL100W • SSL200W • SSL300W • SSL400W		• 24-DC24V • 110-AC110V • 220-AC220V		● R-Red ● A-Amber ● G-Green ● B-Blue

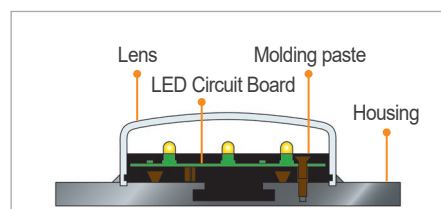

Cross-section of lens structure

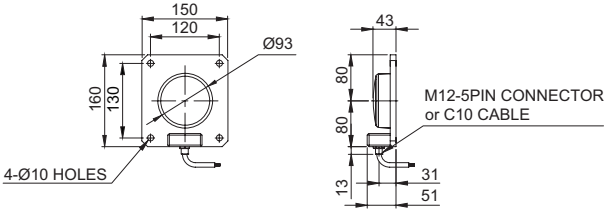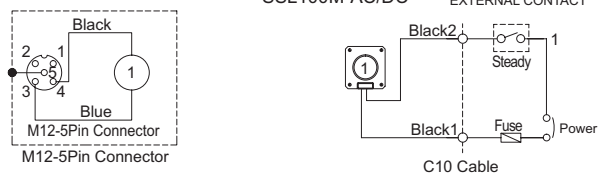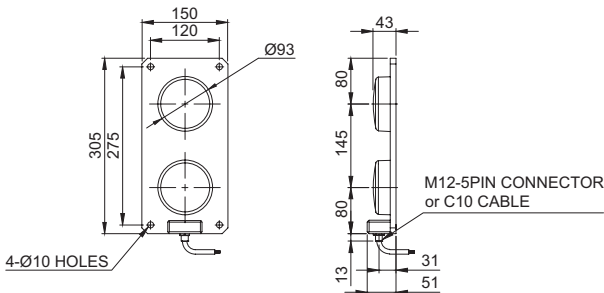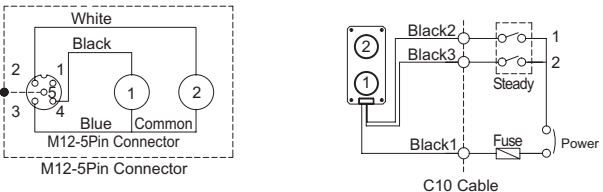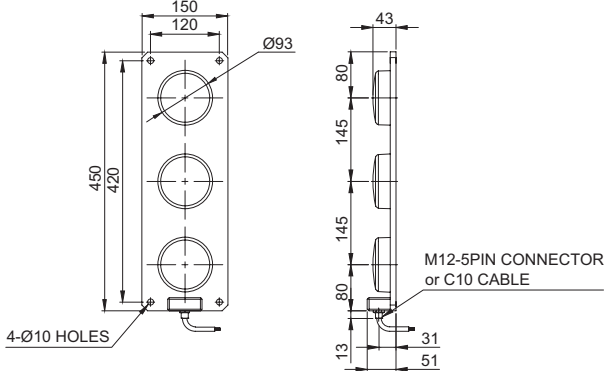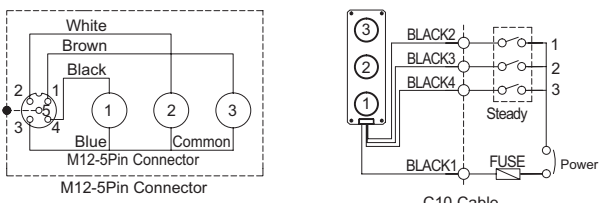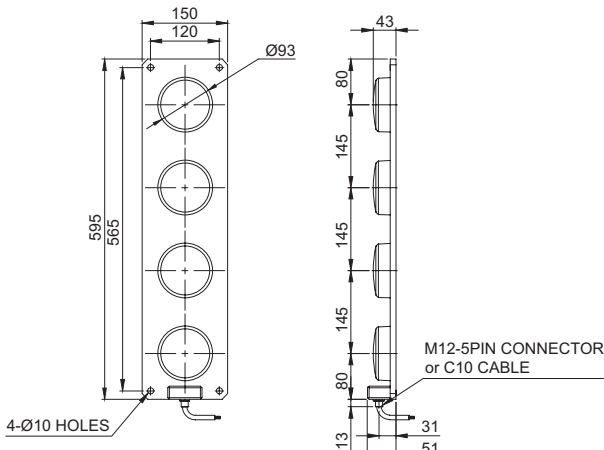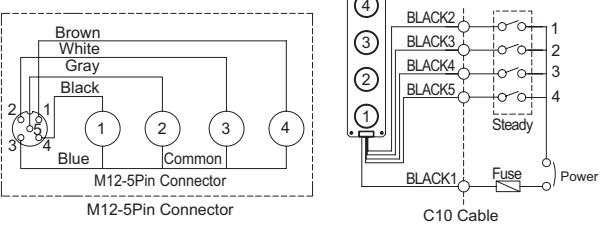SSL series has high resistance to vibration and shock by sealing the housing, lens, and LED circuit board together with epoxy mold compound.

Technical Diagram	Wiring Instructions(External Contact)
SSL100-W/ SSL100M 	SSL100W-AC/DC SSL100M-AC/DC  • M12-5PIN connector type Pin no. 3 is common, however equipped built-in Bridge circuit, power line can be wired to Pin no.3 or 4 regardless of polarity • C10 CABLE TREADING TYPE Treading power line, signal line standard : 7G×0.5mm² 600V/80°C WIRE 1,000mm treading
SSL200-W/ SSL200M 	SSL200W-AC/DC SSL200M-AC/DC  • M12-5PIN connector type Pin no. 3 is common, however equipped built-in Bridge circuit, power line can be wired to Pin no.3 or 1, 4 regardless of polarity • C10 CABLE TREADING TYPE Treading power line, signal line standard : 7G×0.5mm² 600V/80°C WIRE 1,000mm treading
SSL300-W/ SSL300M 	SSL300W-AC/DC SSL300M-AC/DC  • M12-5PIN connector type Pin no. 3 is common, however equipped built-in Bridge circuit, power line can be wired to Pin no.3 or 1, 2, 4 regardless of polarity • C10 CABLE TREADING TYPE Treading power line, signal line standard : 7G×0.5mm² 600V/80°C WIRE 1,000mm treading
SSL400-W/ SSL400M 	SSL400W-AC/DC SSL400M-AC/DC  • M12-5PIN connector type Pin no. 3 is common, however equipped built-in Bridge circuit, power line can be wired to Pin no. 3 and pin no. 1, 2, 4, 5 regardless of polarity • C10 CABLE TREADING TYPE Treading power line, signal line standard : 7G×0.5mm² 600V/80°C WIRE 1,000mm treading

JHB Branch

Mimic Components, Address: 5 Ramsay Street, Booysens, 2091, Johannesburg. Switchboard: +27(0)11-689-5700 | WhatsApp: 071-979-9999
PO Box 38493, Booysens, 2016, Johannesburg, South Africa. Email: info1@mimiccomponents.co.za | Website: www.mimiccomponents.co.za

Cape Branch

Mimic Cape, Address: Unit 41A, Stella Park, 57 Stella Road, Montague Gardens, 7441, Cape Town. Switchboard: +27(0)21-551-8185
WhatsApp: 071-979-9999. Po Box 36955, Chempet, 7442, Cape Town, South Africa. Email: info@mimic-cape.co.za | Website: www.mimic-cape.co.za