

Johannesburg Branch

 **MIMIC COMPONENTS**

Cape Town Branch

 **Mimic Cape**

2022 CATALOG

Wire Tube & Label Printers

Professional Identification Solution Provider



Contents

2 x Model Hand Held Label & Tube Printers

Front Cover	01
Contents	02
Label Printer LP5120M	03
Label Printer LP5125M	04
Consumables of LP Series	05
Stocked consumables & accessories Parts:	
L231E	
LP231E	
Specification Comparison	06

2 x Models Desk Mount Wire Tube Printers

Wire Tube Printer TP76E	07
Wire Tube Printer TP80E	08
Consumables of TP Series	09
Stocked consumables & accessories Parts:	
TP-R100EB	
TP S02 Heat Shrink	
TP S02 Tube	
Plate adjuster for TP80E	
Specification Comparison	10

Label Printer

- 1 Support 6mm/9mm/12mm width label.
- 2 Support 17 kinds of system language, popular with more customers.
- 3 Preload 1356 symbols & some frames, usage of office, warning, transport, bless, sale, etc.
- 4 Up to 50 labels can be printed one time, apply to print lots of labels.




LP5120M

Application



Specification

Project	Parameter
Model	LP5120M
Printing Method	Thermal Transfer
Resolution	203dpi
Printing Speed	20mm/s
Keyboard	QWERTY layout
Display	LCD, White Back-lit, 2 line info display on screen
Input modes	English, Numbers, Bar codes, QR codes, Symbols
Max. Height of Letter	9mm
Multi-Lines	Max. 4 lines of content
Fonts available	3 fonts supported
Symbol Library	1356
System Language	Support 17 kind of languages
Cutting Mode	Manual full cut
Power	AC 9V 2.5A
Power Options	Alkaline AA dry battery, Adapter
Optional Accessories	Adapter (Not include)
Operating Environment	Temperature: 10°C~35°C; RH: 20%~80%RH
Weight	400g
Measurement	203mm*108mm*56mm

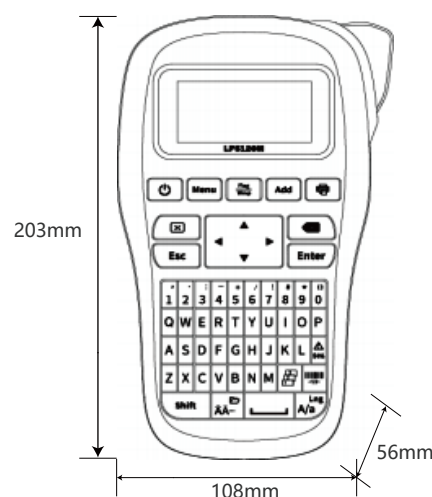

Included Items



Packing box x 1



LP5120M printer x 1

03



Label Tape x 1



User Manual x 1


Label Printer

- 1 Support 6mm/9mm/12mm width label.
- 2 Support 17 kinds of system language, popular with more customers.
- 3 Preload 1356 symbols & some frames, usage of office, warning, transport, bless, sale, etc.
- 4 Up to 50 labels can be printed one time, apply to print lots of labels.
- 5 Automatically full cut to make print lots of labels easily.




LP5125M

Application



Specification

Project	Parameter
Model	LP5125M
Printing Method	Thermal Transfer
Resolution	203dpi
Display	LCD, White Back-lit, 2 line info display on screen
Keyboard	ABC layout, 54 keys
Input modes	English, Numbers, Bar codes, QR codes, Symbols
Max. Height of Letter	9mm
Multi-Lines	Max. 4 lines of content
Fonts available	8 fonts supported
Frames available	Yes
Model available	17
Symbol Library	1356
Printing Speed	20mm/s
Cutting Mode	Automatic full cut
System Language	Support 17 kinds of system language
Max. Segments No.	50 segments, editable & printable one time
File storage	64 files can be stored, each file 50 segments
Power	AC 9V 2.5A
Power Options	Alkaline AA dry battery, Lithium Battery, Adapter,
Optional Accessories	Lithium Battery (optional), Hard Plastic Case (optional)
Operating Environment	Temperature: 10°C~35°C; RH: 20%~80%RH
Weight	630g
Measurement	222mm*120mm*66mm
Warranty	Whole Machine 1 years

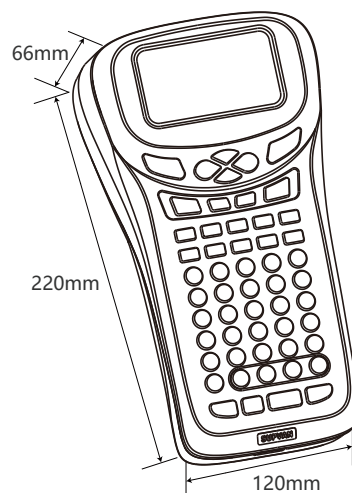

Included Items



Packing box x 1



LP5125M printer x 1



Power Adapter x 1



Label Tape x 1



User Manual x 1



Lithium Battery x 1



Suitcase x 1

Consumables of LP Series

SUPVAN Label Tape	
Width	6mm/9mm/12mm/18mm/24mm
Length	8m
Print type	Label sticker



Consumables of LP5120M & LP5125M



LP5120M



LP5125M

Name	Colour	Specification				
		6mm*8m/roll	9mm*8m/roll	12mm*8m/roll	18mm*8m/roll	24mm*8m/roll
Non-Laminated Tape	White Label Black Ink	—	L-A221E	L-A231E	L-A241E	L-A251E
	Yellow Label Black Ink	—	L-A621E	L-A631E	L-A641E	L-A651E
Strong Adhesive Tape	White Label Black Ink	—	L-P221E	L-P231E	L-P241E	L-P251E
	Yellow Label Black Ink	—	L-P621E	L-P631E	L-P641E	L-P651E
Laminated Tape	White Label Black Ink	L-211E	L-221E	L-231E	L-241E	L-251E
	White Label Red Ink	—	L-222E	L-232E	L-242E	L-252E
	White Label Blue Ink	—	L-223E	L-233E	L-243E	L-253E
	Clear Label Black Ink	L-111E	L-121E	L-131E	L-141E	L-151E
	Clear Label White Ink	—	—	L-135E	L-145E	L-155E
	Clear Label Red Ink	—	—	L-132E	—	—
	Clear Label Blue Ink	—	—	L-133E	—	—
	Yellow Label Black Ink	L-611E	L-621E	L-631E	L-641E	L-651E
	Black Label White Ink	L-315E	L-325E	L-335E	L-345E	L-355E
	Red Label Black Ink	—	L-421E	L-431E	L-441E	L-451E
	Red Label White Ink	—	—	L-435E	—	—
	Blue Label Black Ink	—	L-521E	L-531E	L-541E	L-551E
	Blue Label White Ink	—	—	L-535E	—	L-555E
	Green Label Black Ink	—	L-721E	L-731E	L-741E	L-751E
	Green Label White Ink	—	—	L-735E	—	L-755E
	Matte Silver Label Black Ink	—	—	L-831E	L-841E	L-851E

Specification Comparison

Model	LP5120M	LP5125M
Picture		
Printing Method	Thermal Transfer	Thermal Transfer
Cutting Mode	Manual	Automatic full cut
Display	LCD, White Back-lit, 2 line info display on screen	LCD, White Back-lit, 2 line info display on screen
Display Backlight	×	√
Resolution	203dpi	203dpi
Keyboard	QWERTY layout, 56 keys	ABC layout, 54 keys
Fuction Shortcut Keys	×	√
Label Width	6mm, 9mm,12mm	6mm, 9mm,12mm
Printing Speed	20mm/s	20mm/s
Input modes	English, Numbers, Bar codes, QR codes, Symbols	English, Numbers, Bar codes, QR codes, Symbols
Max. Height of Letter	9 mm	9 mm
Multi-Lines	Max. 4 lines of content	Max. 4 lines of content
Max. Segments No.	50 segments, editable & printable one time	50 segments, editable & printable one time
File Sotrage	64 files can be stored, each file up to 50 segments	64 files can be stored, each file up to 50 segments
Fonts available	3 fonts supported	8 fonts supported
Frames available	Yes	Yes
Symbol Library	1356	1356
Frames available	Built-in 17 kinds of language(English, čeština, Slovenčina, Polski, - Deutsch, Español, Français, Italiano, Русский ,Magyar, Nederlands, Norsk, Por- tuguês, Suomi, Svenska, Türkçe, Dansk)	Built-in 17 kinds of language(English, čeština, Slovenčina, Polski, - Deutsch, Español, Français, Italiano, Русский ,Magyar, Nederlands, Norsk, Por- tuguês, Suomi, Svenska, Türkçe, Dansk)
PC software	×	×
Power	AC 9V 2.5A	AC 9V 2.5A
Power Options	Alkaline 6AA battery(not include), Adapter(optional, not include)	Alkaline 6AA battery(not include), Adapter(optional, not include)
Accessories	Adapter (optional, not include)	Lithium Battery&AC power Adapter(in- clude), Hard Plastic Case(include)
Operating Environment	Temperature: 10°C~35°C; RH: 20%~80%RH	Temperature: 10°C~35°C; RH: 20%~80%RH
Weight	400g	630g
Measurement	203*108*56mm	222*120*66mm

Wire Tube Printer

- 1 Different printing materials: tube/ heat shrink tube (2.5-6mm diameter), label (6mm/9mm/12mm width).
- 2 Large white back-lit LCD display, up to 2 lines display on TP76E.
- 3 Automatic feed/clean/ribbon pre tighten/half cut/full cut.
- 4 85-key standard keyboard makes operation easily.
- 5 Repeat, sequence and copy print functions can save your time.
- 6 USB PC link, professional editing software.
- 7 Large internal storage capacity can store up to 200 files.




TP76E

Application



Specification

Project	Parameter
Model	TP76E
Printing method	Thermal transfer
Resolution	300dpi
Printing speed	Tube:35pcs/min,20mm/pcs Label:35pcs/min,20mm/pcs
Ink Ribbon	Black:100m,White:80m,Red:80m
Input modes	Alphanumeric, Symbol, English character input
Character size	Label:1-7 Tube:1-5
Repeat	1-200
Media cutting method	Automatic half-cutting, Automatic full-cutting
Styles	Frame, Underline, Superscript, Subscript
Tape type	Tube, Heat shrink tube, Label
Keyboard	85keys standard keyboard
Dimension(L×W×H)	320mm*280mm*80mm
Weight	3kg(printer only)
Power supply	AC adapter(Input voltage: AC 100V-240V 50/60Hz)
Display	White back-lit LCD display; Up to 2-line editing interface
Internal memory	Up to 200 files 200 paragraph/file (12,000,000 characters)
Operating environment	15 C -35 C
PC interface	USB2.0 Full-speed, Professional editing software
Tube	PVC tubeΦ2.5-Φ6mm Heat shrink tube Φ2.5-Φ6mm
Label	Exclusive cassettes(White, yellow, silver) Width:6mm, 9mm, 12 mm.Length:16m
Insert Stick Plate	Not Applicable

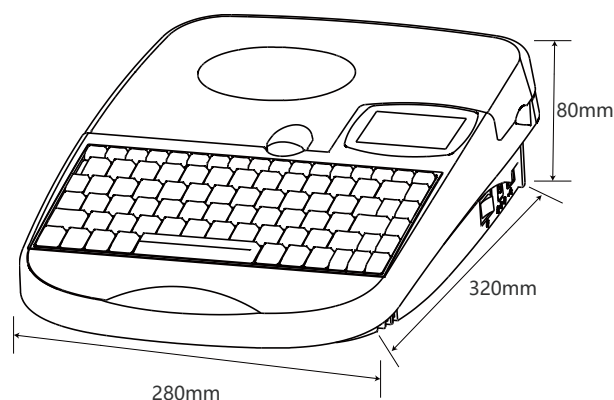

Included Items



Packing box x 1 TP76E printer x 1 Hand suitcase x 1 Power line x 1 Power adapter x 1 Label Cassette x 1 Tube Adjuster x 1 Ribbon Cassette x 1 USB cable x 1 User Manual x 1 CD-ROM x 1 Quality Certificate x 1


Wire Tube Printer

- 1 Different printing materials: tube/ heat shrink tube (2.5-6mm diameter), label (6mm/9mm/12mm width), plate 4mm/4.6mm/9mm.
- 2 Large white back-lit LCD display, up to 10 lines display on TP80E.
- 3 Automatic feed/clean/ribbon pre tighten/half cut/full cut.
- 4 85-key standard keyboard makes operation easily.
- 5 Repeat, sequence and copy print functions can save your time.
- 6 USB PC link, professional editing software.
- 7 Large internal storage capacity can store up to 200 files.




TP80E

Application



Specification

Project	Parameter
Model	TP80E
Printing method	Thermal transfer
Resolution	300dpi
Printing speed	Tube:40pcs/min,20mm/pcs Label:40pcs/min,20mm/pcs
Ink Ribbon	Black:100m,White:80m,Red:80m
Input modes	Alphanumeric, Symbol, English character input
Character size	Label:1-7 Tube:1-5
Repeat	1-200
Media cutting method	Automatic half-cutting, Automatic full-cutting
Styles	Frame, Underline, Superscript, Subscript
Tape type	Tube, Heat shrink tube, Label, Plate
Keyboard	85keys standard keyboard
Dimension(L×W×H)	320mm*280mm*100mm
Weight	3.2kg(printer only)
Power supply	AC adapter(Input voltage: AC 100V-240V 50/60Hz)
Display	White back-lit LCD display; Single and double column display; Up to 5-line editing interface
Internal memory	Up to 200 files 200 paragraph/file (12,000,000 characters)
External memory	SD card and card reader
Operating environment	15℃-35℃
PC interface	USB2.0 Full-speed, Professional editing software
Tube	PVC tubeΦ2.5-Φ6mm Heat shrink tube Φ2.5-Φ6mm
Label	Exclusive cassettes(White, yellow, silver) Widths:6mm, 9mm, 12 mm.Length:16m
Insert Stick Plate	Width:4mm, 4.6mm, 9mm

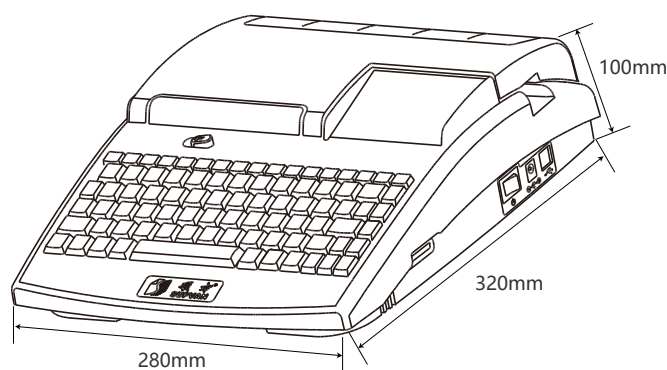

Included Items



Consumables of TP Series






Consumables of TP76E, TP80E



TP76E



TP80E

Picture	Consumable Type	Model No.	Specification
 Ribbon	Black ribbon 	TP-R100EB	width: 12mm, length: 100 m/roll
	Red ribbon 	TP-R80ER	width: 12mm, length: 80 m/roll
	White ribbon 	TP-R80EW	width: 12mm, length: 80 m/roll
 label	6mm white label 	TP-L06EW	width: 6mm, length: 16 m/roll
	6mm yellow label 	TP-L06EY	width: 6mm, length: 16 m/roll
	6mm silver label 	TP-L06ES	width: 6mm, length: 16 m/roll
	9mm white label 	TP-L09EW	width: 9mm, length: 16 m/roll
	9mm yellow label 	TP-L09EY	width: 9mm, length: 16 m/roll
	9mm silver label 	TP-L09ES	width: 9mm, length: 16 m/roll
	12mm white label 	TP-L12EW	width: 12mm, length: 16 m/roll
	12mm yellow label 	TP-L12EY	width: 12mm, length: 16 m/roll
	12mm silver label 	TP-L12ES	width: 12mm, length: 16 m/roll
Picture	Suit for Wire outer diameter	Size	Length(1kg/roll)
 PVC Tube	2.0mm	0.5 ²	145m
	2.3mm	0.75 ²	130m
	2.6mm	1.0 ²	112m
	3.2mm	1.5 ²	100m
	3.6mm	2.5 ²	72m
	4.2mm	4.0 ²	62m
	5.1mm	6.0 ²	48m
	6.3mm	8.0 ²	40m

Specification Comparison

Model	TP76E		TP80E	
Picture				
Product Type	Tube Printer		Tube Printer	
Printing Method	Thermal transfer		Thermal transfer	
Resolution	300dpi		300dpi	
Media type	Tube, Heat shrink tube, Label		Tube, Heat shrink tube, Label, Plate	
Character Size	Label:1-7 Tube:1-5		Label:1-7 Tube:1-5 Plate:1-2	
Length	6-100mm		6-100mm	
Repeat	1-200		1-200	
PC Connection	USB2.0 full-speed professional editing software		USB2.0 full-speed professional editing software	
Printing Speed	Tube/Label: 35pcs/min, 20mm/pcs		Tube/Label/Plate: 40pcs/min, 20mm/pcs	
Display	White back-lit LCD display; Up to 2-line editing interface		White back-lit LCD display; Single and double column display; Up to 5-line editing interface	
Input Modes	English letters, Symbols		English letters, Symbols	
Internal Memory	Up to 200 files 200 paragraph/file (12,000,000 characters)		Up to 200 files 200 paragraph/file (12,000,000 characters)	
External Memory	×		SD card and card reader	
Cutting Method	Automatic half cut, automatic full cut, solid line, none		Automatic half cut, automatic full cut, solid line, none	
Feeding Method	Automatic feed		Automatic feed	
Printing Material	Tube/Heat shrink tube: 2.5-6mm diameter Label: 6/9/12mm width		Tube/Heat shrink tube: 2.5-6mm diameter Label: 6/9/12mm width Plate: 4/4.6/9mm width	
Keyboard	85-Key standard keyboard		85-Key standard keyboard	
Power Supply	AC adapter (Input voltage: AC 100-240V 50/60 Hz)		AC adapter (Input voltage: AC 100-240V 50/60 Hz)	
Dimension (L*W*H)	320mm*280mm*80mm		320mm*280mm*100mm	
Weight	3kg (printer only)		3.2kg (printer only)	
Operating Environment	15℃-35℃		15℃-35℃	

JOHANNESBURG



MIMIC COMPONENTS

ELECTRICAL & ELECTRONIC
WHOLESALE DISTRIBUTORS
SOUTHERN AFRICA

Address

5 Ramsay Street, Booyens,
2091 Johannesburg,
South Africa

P.O. Box 38493 Booyens,
2016 South Africa

Telephone:
Switchboard: +27 (0)11- 689-5700

Website: www.mimiccomponents.co.za
Email: info1@mimiccomponents.co.za

CAPE TOWN



Mimic Cape

MIMIC CAPE

ELECTRICAL & ELECTRONIC
WHOLESALE DISTRIBUTORS
SOUTHERN AFRICA

Address

Unit 41A, Stella Park,
57 Stella Road, Montague Gardens,
Cape Town, 7441, South Africa

PO. Box 36955 Chempet,
7442 South Africa

Telephone:
Switchboard: +27(0) 21-551-8185

Website: www.mimic-cape.co.za
Email: info@mimic-cape.co.za



MIMIC COMPONENTS sales@mimic.co.za www.mimic.co.za TEL: +27(0)11 689-5700
5 Ramsay Street, Booyens 2091, Johannesburg PO. Box 38493, Booyens 2016, Johannesburg, South Africa



MIMIC CAPE anje@mimics.co.za www.mimic.co.za TEL: +27(0)21-551-8185 FAX: +27(0)21-551-8169
Unit 41A, Stella Park, 57 Stella Road, Montague Gardens, Cape Town 7441. PO Box 36955 Chempet 7442 South Africa